


One project, seven cost boundaries

The battery supply contract is \$12.1 million. The project that puts it into service is \$57.2 million. Both figures are correct; they describe different scopes. The table shows the same project at each boundary where a cost can be quoted, so that any published benchmark can be set beside the row that shares its definition.

\$ per kWh at each boundary (20 MWh)

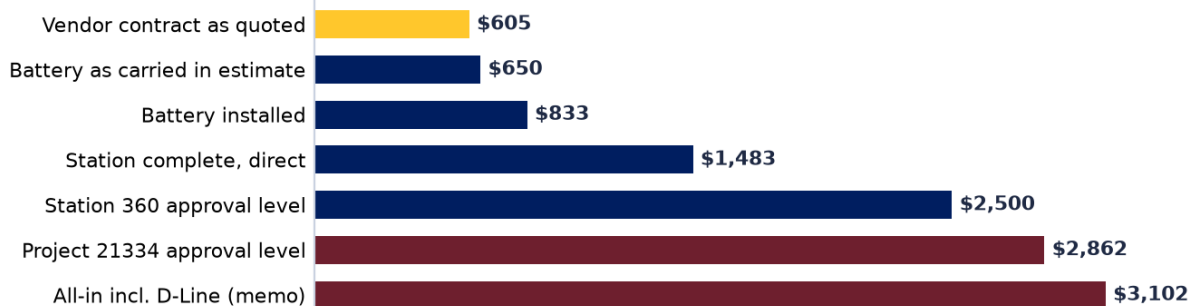

Boundary	Total	\$/kW	\$/kWh	x	What this boundary adds
1 Vendor contract as quoted	\$12,106,850	\$1,211	\$605	1.0x	Twelve LFP units, PCS, BMS, fire protection, 10-yr warranty, spares, support, supervision. Fixed price (Nomad, 10 Mar 2026).
2 Battery as carried in estimate	\$12,991,104	\$1,299	\$650	1.1x	Adds \$1.13M escalation on the unpaid balance.
3 Battery installed	\$16,657,252	\$1,666	\$833	1.4x	Adds installation labor, foundation pads, fire suppression, four 3 MVA step-up transformers, EMS, auxiliary power.
4 Station complete, direct	\$29,665,294	\$2,967	\$1,483	2.5x	Adds the 13.8 kV switching station (four breaker skids, metering, cable, duct bank, ground grid), landfill site development, testing, engineering, Article 80 siting, outreach, project management, taxes.
5 Station 360 approval level	\$49,994,200	\$4,999	\$2,500	4.1x	Adds risk register, contingency, corporate indirects, AFUDC.
6 Project 21334 approval level	\$57,247,300	\$5,725	\$2,862	4.7x	Adds Station 496 feeder protection: 20 relays, transfer trip, RTU, testing (\$7.25M).
7 All-in incl. D-Line (memo)	\$62,040,300	\$6,204	\$3,102	5.1x	Adds the 5,465 ft circuit extension under project 24211 (\$4.79M, Feb 2024 conceptual, not re-based).

Where the other 79 percent sits (loaded, i.e. with risk, contingency, indirects and AFUDC spread across Station 360 layers): station and feeder interconnection facilities \$18.3M (32%); battery installation and balance of plant \$6.2M (11%); engineering, siting, outreach, project management, testing and taxes \$10.9M (19%); battery supply contract \$21.9M (38%).

Reading a benchmark against this table. A published \$/kWh figure belongs beside the boundary that shares its scope. Pack and cell prices (BloombergNEF, \$70 to \$108/kWh in 2025) stop at the factory door and compare to nothing here. Turnkey system prices (BloombergNEF US \$219/kWh, 2025; Anza distribution-scale \$203/kWh, Q1 2026) stop at the fence and compare to boundary 3, after adjusting a four-hour, 100 MW reference to two hours and 10 MW. All-in developer benchmarks (NREL \$334/kWh, EIA and Sargent & Lundy \$436/kWh, LBNL \$458/kWh, all four-hour, 60 to 150 MW) compare to boundary 4, less a developer's margin. Disclosed utility-owned projects (Eversource Provincetown \$1,289/kWh, 1.5-hour, 2022; NV Energy Reid Gardner \$584/kWh, 2-hour, 220 MW on an existing switchyard) are the only family that carries a utility's scope, and none carries a separate switching station, a feeder protection program at the source substation, or AFUDC. Five attributes must travel with every figure quoted: boundary, duration, size, dollar year and what is inside the fence.

Basis: ESF Total Rev 3, 24 Sep 2026 (Conceptual, -25%/+50%); Nomad cover agreement Exhibit C, 10 Mar 2026; SSF Feb 2024 for the D-Line memo. All 292 estimate lines are assigned to thirteen layers in the companion workbook and reconcile to the \$57,247,544 unrounded total. Benchmarks are from published sources as retrieved 29 Sep 2026 with confidence tags in the whitepaper; verify against primary documents before external filing. Prepared by the Cost Estimating Center of Excellence, Eversource Energy, 29 Sep 2026. Internal; contains vendor-confidential pricing.